


This exploded view diagram illustrates the assembly of a 5-speed manual transmission. The components are organized into four main sections, labeled A through D, representing the input shaft, intermediate shafts, and output shaft assembly.

- Section A (Input Shaft):** Includes the Converter Reactor (529-1), Mainshaft (672), and 4th gear components (882, 220, 809, 861, 140\*, 100, 120, 850, 862, 980, 970, 560, 960).
- Section B (Intermediate Shaft):** Includes the 2nd Drum (552), 2nd Clutch (562, 852, 124, 104, 144\*, 873, 252, 251, 572, 803, 983, 983-1, 243), and 2nd gear components (238, 1391-1, 391, 697, 238, 239, 783, 881, 332, 962, 972, 874, 982).
- Section C (Intermediate Shaft):** Includes the 3rd Drum (555), 3rd Clutch (565, 858, 126, 106, 146\*, 878, 281, 282, 285, 807, 280, 710, 889-1, 889, 895, 278\*, 279), and 3rd gear components (686, 256, 184, 357, 673, 336, 337, 965, 975, 985, 862-1).
- Section D (Output Shaft):** Includes the Countershaft (676), 2nd gear (804, 260, 261, 712, 262, 263), 1st gear (801, 810, 268, 694, 887, 886, 271, 269), 4th gear (813, 835, 830, 816, 272, 273, 890, 274, 208, 796), 5th gear (813, 835, 830, 816, 272, 273, 890, 274, 208, 796), and the Shift Fork (840).



## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

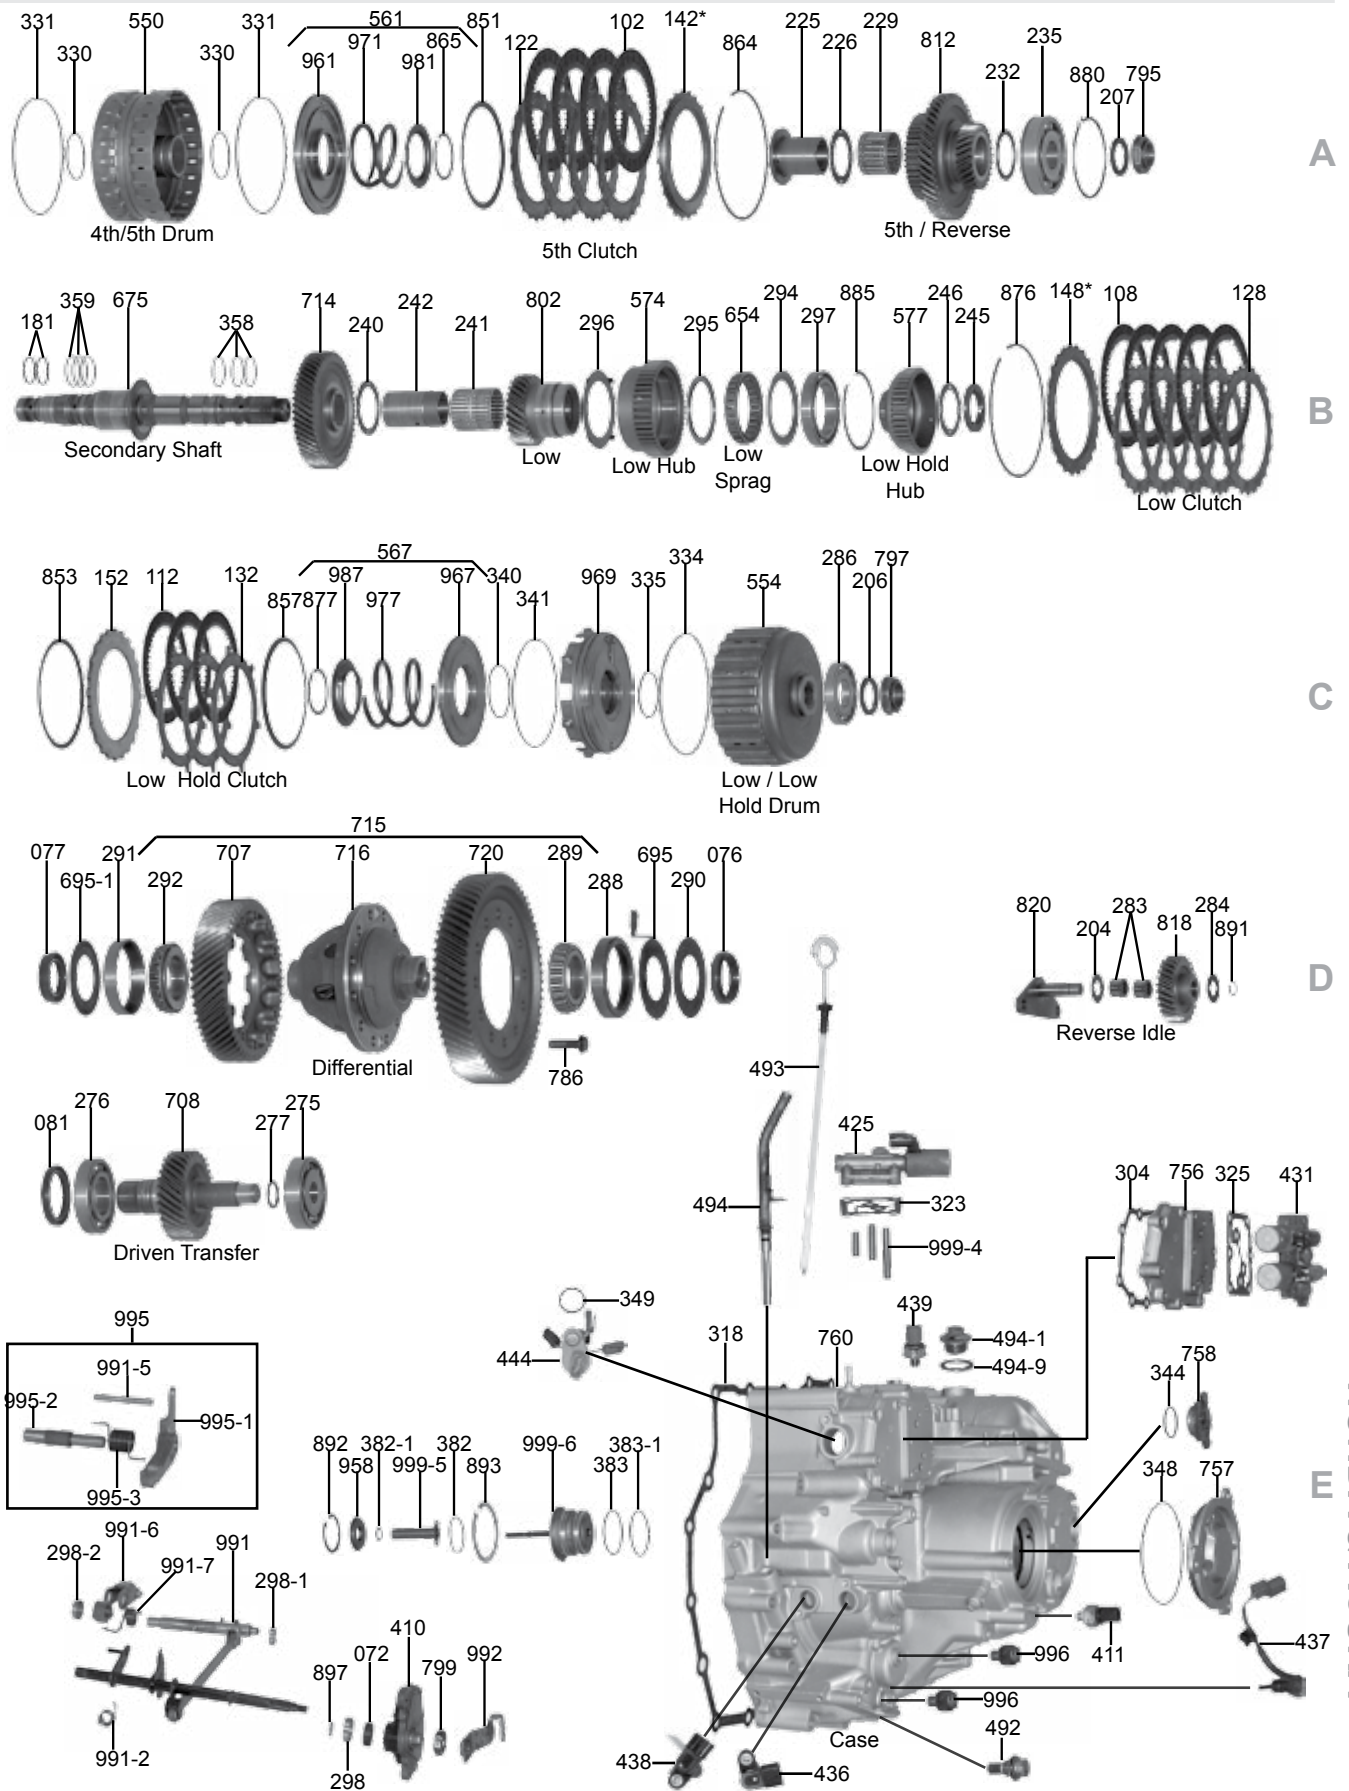

## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
<b>KITS</b>				
		**SEE HONDA/ACURA OVERHAUL / BANNER / MASTER KIT QUICK REF **		
		BDHA/BDKA/BJFA/BK3A/BK4A/BVLA/BWEA/BYFA/B36A/B97A/MDKA/MDPA/		
		MDRA/MJBA/MJFA/MM2A/MURA/MYFA/PN3A/PN4A/PSFA/PVLA/P34A/P35A/P36A		
<b>FILTERS</b>				
		**SEE HONDA/ACURA FILTER QUICK REF FOR INTERNAL & AUX FILTERS**		
<b>BUSHINGS</b>				
062-1	188062-1	Bushing, BYFA/B36A/MDKA/MDPA/MDRA/P36A Secondary Shaft (Small, Inner)(.238" ID)	1	TBA
062	188062	Bushing, BYFA/B36A/MDKA/MDPA/MDRA/P36A Secondary Shaft (Large, Outer)(.455" ID)	1	TBA
<b>METAL CLAD SEALS</b>				
		**SEE HONDA/ACURA KIT & FRONT SEAL / AXLE SEAL QUICK REF**		
072	78197	Seal, Manual Lever Shaft	1	91209-612-003
081	121154	Seal, Output to Transfer Case (.320" Thk, 2.565" OD, 1.825" ID) 2007-Up	1	91201-RDK-003
<b>FRICTIONS</b>				
100	121106R	Friction, BDKA/MDKA/MDPA/MDRA 4th Clutch (.076")(44 Teeth)(5.115" OD) 2003-08	4	22645-RDK-003
100	121109A	Friction, BYFA/B36A/P36A 4th Clutch (.076")(32 Teeth)(5.225" OD)	5	22645-RJB-L01
100	121109B	Friction, BYFA/B36A/P36A 4th Clutch (.076")(42 Teeth)(5.225" OD)	5	22645-RYF-003
100	121107	Friction, BYFA/B36A/P36A 4th Clutch (.076")(45 Teeth)(5.225" OD)	5	22645-R97-003
100	121107A	Friction, BJFA/MJBA/MJFA 4th Clutch 2005-Up	5	22646-RJB-003
102	121109A	Friction, BYFA/B36A/P36A 5th Clutch (.076")(32 Teeth)(5.225" OD)	5	22645-RJB-L01
102	121109B	Friction, BYFA/B36A/P36A 5th Clutch (.076")(42 Teeth)(5.225" OD)	5	22645-RYF-003
102	121106R	Friction, BDKA/MDKA/MDPA/MDRA 5th Clutch (.076")(44 Teeth)(5.115" OD) 2003-08	4	22645-RDK-003
102	121107A	Friction, BJFA/MJBA/MJFA 5th Clutch 2005-Up	5	22646-RJB-003
104	121101F	Friction, 2nd Clutch (.076")(28T)(4.700" OD) 2003-Up	7	22545-RDK-023
106	121103F	Friction, BDKA/MDKA/MDPA/MDRA 3rd Clutch (.076")(42 Teeth)(5.030" OD) 2003-Up	5	22644-RDK-003
106	121105B	Friction, BYFA/B36A/P36A 3rd Clutch (.076")(32 Teeth)(5.030" OD)	6	22644-RJB-L01
106	121105A	Friction, BYFA/B36A/P36A 3rd Clutch (.076")(42 Teeth)(5.030" OD)	5-6	22644-R97-003
108	98106B	Friction, BDKA/BYFA/B36A/MDKA/MDPA/MDRA/P36A Low Clutch (.076")(49T)(5.192" OD)	5	22544-P7W-003
108	98101	Friction, MURA Low Clutch (.076")(44 Teeth)(4.725" OD) 2005-07	5	22544-RJB-L01
108	98106B	Friction, BJFA/MJBA/MJFA Low Clutch (.076")(49 Teeth)(5.192" OD) 2005-08	5	22544-P7W-003
112	98101	Friction, Low Hold (.076")(44 Teeth)(4.725" OD) 2003-08	3	22544-RJB-L01
<b>STEELS</b>				
120	121116A	Steel, BYFA/B36A/P36A 4th Clutch (.063")(24 Teeth)(3.740" ID)	5	22659-RFY-003
120	121108C	Steel, MDKA/MDPA/MDRA 4th Clutch (.080")(24 Teeth)(3.675" ID)	4	22656-RDK-003
122	121108C	Steel, MDKA/MDPA/MDRA 5th Clutch (.080")(24 Teeth)(3.675" ID)	4	22656-RDK-003
122	121118	Steel, BYFA/B36A/P36A 5th Clutch (.063")(24 Teeth)(3.675" ID)	5	22657-RYF-003
124	121112C	Steel, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.071")(24 Teeth)(3.393" ID)	7	22643-RDK-013
126	121113B	Steel, MDKA/MDPA/MDRA 3rd Clutch (.071")(20 Teeth)(3.470" ID)	5	22653-RDK-003
126	121114A	Steel, B36A/P36A 3rd Clutch (.078")(20 Teeth)(3.570" ID)	5	22653-RJB-E01
126	121114B	Steel, BYFA 3rd Clutch (.071")(24 Teeth)(3.570" ID)	6	22653-RYF-003
128	121111	Steel, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low Clutch (.062")(24 Teeth)(4.070" ID)	5	22543-P7W-003
132	121114	Steel, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low Hold Clutch (.072")(6 Teeth)(3.675" ID)	3	22673-P7W-003
<b>PRESSURE PLATES</b>				
140	188140	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.082")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140A	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.086")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140B	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.090")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140C	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.094")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140D	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.098")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140E	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.102")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140F	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.106")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140G	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.110")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140H	Pressure Plate, BYFA/B36A/P36A 4th Clutch (.114")(24T, 3.735" ID)(Stepped)	1	TBA
140	188140AA	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.082")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22571-RYF-003
140	188140AB	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.086")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22572-RYF-003
140	188140AC	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.090")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22573-RYF-003
140	188140AD	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.094")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22574-RYF-003
140	188140AE	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.098")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22575-RYF-003
140	188140AF	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.102")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22576-RYF-003
140	188140AG	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.106")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22577-RYF-003
140	188140AH	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.110")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22578-RYF-003
140	188140AJ	Press Plate, MDKA/MDPA/MDRA 4th & 5th(#142) (.114")(24T, 5.317" OD, 3.675" ID)(Step)	1-2	22579-RYF-003
142	188142BA	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.082") (#1) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA



# HONDA & ACURA

## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
142.....	188142BB	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.086") (#2) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BC	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.090") (#3) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BD	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.094") (#4) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BE	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.098") (#5) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BF	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.102") (#6) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BG	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.107") (#7) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BH	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.110") (#8) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
142.....	188142BJ	Pressure Plate, BYFA/B36A/P36A 5th Clutch (.114") (#9) (24T, 5.41" OD, 3.675" ID, Stepped)	1	TBA
144.....	188144	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.082") (#1) (24T, 3.395" ID)	1	22561-RDK-003
144.....	188144A	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.087") (#2) (24T, 3.395" ID)	1	22562-RDK-003
144.....	188144B	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.090") (#3) (24T, 3.395" ID)	1	22563-RDK-003
144.....	188144C	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.094") (#4) (24T, 3.395" ID)	1	22564-RDK-003
144.....	188144D	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.098") (#5) (24T, 3.395" ID)	1	22565-RDK-003
144.....	188144E	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.102") (#6) (24T, 3.395" ID)	1	22566-RDK-003
144.....	188144F	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.106") (#7) (24T, 3.395" ID)	1	22567-RDK-003
144.....	188144G	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.110") (#8) (24T, 3.395" ID)	1	22568-RDK-003
144.....	188144H	Pressure Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.114") (#9) (24T, 3.395" ID)	1	22569-RDK-003
146.....	188146	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.082") (#1) (20T, 3.465" ID)	1	22591-RDK-A01
146.....	188146A	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.087") (#2) (20T, 3.465" ID)	1	22592-RDK-A01
146.....	188146B	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.090") (#3) (20T, 3.465" ID)	1	22593-RDK-A01
146.....	188146C	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.094") (#4) (20T, 3.465" ID)	1	22594-RDK-A01
146.....	188146D	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.098") (#5) (20T, 3.465" ID)	1	22595-RDK-A01
146.....	188146E	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.102") (#6) (20T, 3.465" ID)	1	22596-RDK-A01
146.....	188146F	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.106") (#7) (20T, 3.465" ID)	1	22597-RDK-A01
146.....	188146G	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.110") (#8) (20T, 3.465" ID)	1	22598-RDK-A01
146.....	188146H	Pressure Plate, MDKA/MDPA/MDRA 3rd Clutch (.114") (#9) (20T, 3.465" ID)	1	22599-RDK-A01
146.....	188146BA	Pressure Plate, B36A/P36A 3rd Clutch (.082") (#1) (20 Teeth) (3.565" ID)	1	22591-RJB-E01
146.....	188146BB	Pressure Plate, B36A/P36A 3rd Clutch (.087") (#2) (20 Teeth) (3.565" ID)	1	22592-RJB-E01
146.....	188146BC	Pressure Plate, B36A/P36A 3rd Clutch (.090") (#3) (20 Teeth) (3.565" ID)	1	22593-RJB-E01
146.....	188146BD	Pressure Plate, B36A/P36A 3rd Clutch (.094") (#4) (20 Teeth) (3.565" ID)	1	22594-RJB-E01
146.....	188146BE	Pressure Plate, B36A/P36A 3rd Clutch (.098") (#5) (20 Teeth) (3.565" ID)	1	22595-RJB-E01
146.....	188146BF	Pressure Plate, B36A/P36A 3rd Clutch (.102") (#6) (20 Teeth) (3.565" ID)	1	22596-RJB-E01
146.....	188146BG	Pressure Plate, B36A/P36A 3rd Clutch (.106") (#7) (20 Teeth) (3.565" ID)	1	22597-RJB-E01
146.....	188146BH	Pressure Plate, B36A/P36A 3rd Clutch (.110") (#8) (20 Teeth) (3.565" ID)	1	22598-RJB-E01
146.....	188146BJ	Pressure Plate, B36A/P36A 3rd Clutch (.114") (#9) (20 Teeth) (3.565" ID)	1	22599-RJB-E01
146.....	188146CA	Pressure Plate, BYFA 3rd Clutch (.082") (#1) (24 Teeth) (3.570" ID)	1	22591-RFY-003
146.....	188146CB	Pressure Plate, BYFA 3rd Clutch (.087") (#2) (24 Teeth) (3.570" ID)	1	22592-RFY-003
146.....	188146CC	Pressure Plate, BYFA 3rd Clutch (.090") (#3) (24 Teeth) (3.570" ID)	1	22593-RFY-003
146.....	188146CD	Pressure Plate, BYFA 3rd Clutch (.094") (#4) (24 Teeth) (3.570" ID)	1	22594-RFY-003
146.....	188146CE	Pressure Plate, BYFA 3rd Clutch (.098") (#5) (24 Teeth) (3.570" ID)	1	22595-RFY-003
146.....	188146CF	Pressure Plate, BYFA 3rd Clutch (.102") (#6) (24 Teeth) (3.570" ID)	1	22596-RFY-003
146.....	188146CG	Pressure Plate, BYFA 3rd Clutch (.106") (#7) (24 Teeth) (3.570" ID)	1	22597-RFY-003
146.....	188146CH	Pressure Plate, BYFA 3rd Clutch (.110") (#8) (24 Teeth) (3.570" ID)	1	22598-RFY-003
146.....	188146CJ	Pressure Plate, BYFA 3rd Clutch (.114") (#9) (24 Teeth) (3.570" ID)	1	22599-RFY-003
148.....	188148	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.122") (#1) (24T, 4.065" ID, Stepped)	1	22551-RDK-003
148.....	188148A	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.126") (#2) (24T, 4.065" ID, Stepped)	1	22552-RDK-003
148.....	188148B	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.130") (#3) (24T, 4.065" ID, Stepped)	1	22553-RDK-003
148.....	188148C	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.134") (#4) (24T, 4.065" ID, Stepped)	1	22554-RDK-003
148.....	188148D	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.138") (#5) (24T, 4.065" ID, Stepped)	1	22555-RDK-003
148.....	188148E	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.142") (#6) (24T, 4.065" ID, Stepped)	1	22556-RDK-003
148.....	188148F	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.146") (#7) (24T, 4.065" ID, Stepped)	1	22557-RDK-003
148.....	188148G	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.150") (#8) (24T, 4.065" ID, Stepped)	1	22558-RDK-003
148.....	188148H	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low (.154") (#9) (24T, 4.065" ID, Stepped)	1	22559-RDK-003
152.....	188152	Press Plate, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low Hold Clutch (.197") (24T, 3.690" ID)	1	22675-RDK-003

### SEALING RINGS

175.....	188175	Ring Kit, 2003-11	1	TBA
----------	--------	-------------------	---	-----

### WASHERS & BEARINGS

204.....	98421	Washer, (.040" Thick) (1.175" OD) (Flat)	1	90408-P7X-006
206.....	98401	Washer, Under Countershaft Nut	1	90402-POZ-000
207.....	188207	Washer, Main & 2ndary (.155", 1.572" OD, 1.152" ID, 8-Spline)	1-2	90402-RDK-000
209.....	88209M	Caged Bearing, Stator (Front) (1.040" OD)	1	TBA
211.....	188211	Ball Brg, MDKA/MDPA/MDRA Bell To Conv Hub (.295" Thk, 16-Balls, #DG426808)	1	91001-RDK-004
211.....	188211A	Ball Brg, BYFA/B36A/P36A Bell To Conv Hub (.380" Thk 14-Balls, #TM-SX08C53)	1	91001-R97-003
214.....	188214	Needle Bearing, MDKA/MDPA/MDRA Mainshaft To Conv Reactor (Rear) (.850" Long)	1	91017-RDK-003
214.....	188214A	Needle Bearing, BYFA/B36A/P36A Mainshaft To Converter Reactor (Rear) (.992" Long)	1	91017-RJF-T01
220.....	188220	Ball Brg, 4th Gr To Main (1.220", 3.075" OD, 1.495" ID) (14-Balls, #08B11 / 08A96)	1	91007-RDK-003

## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
225	188225	Collar, 5th Gear To Main (1.920" Long, 1.300" ID, W/Shoulder)	1	90501-RDK-000
226	188226	Bearing, 5th Gear To Collar # 225 (.118" Thk, 2.315" OD, 1.580" ID)	1	91031-RDK-003
229	188229	Caged Needle Bearing, 5th Gear To Mainshaft (1.325" Thick, 1.785" OD)	1	91016-RDK-003
232	188232	Bearing, BYFA/MDKA/MDRA 5th Gear To Brg # 235 (.099" Thick)(2.065" OD)(1.580" ID)	1	91021-PRP-013
232	188232A	Bearing, B36A/MDPA/P36A 5th Gear To Brg # 235 (.099" Thick)(2.020" OD)(1.580" ID)	1	91022-RJF-T01
235	188235	Ball Brg, BYFA/MDKA/MDPA/MDRA Mainshaft To Case (9-Balls, #29BC08S4N)	1	91002-PVG-A00
235	188235A	Ball Bearing, B36A/P36A Mainshaft To Case (8-Balls, #29BC08S7N)	1	91002-RJF-T01
238-1	188238-1	Needle Brg, 2ndary To Bell (Small Inner)(.372", 1.528" OD, #BE-NK28.8X38)	1	TBA
238	188238	Roller Bearing, 2ndary To Bell (.747", 2.480" OD)(12-Roller, #8E-NK 32X63X19-2)	1	91101-RDK-003
239	188239	Brg, 2ndary Shaft Drum To Front Brg (.180", 2.475" OD, 1.820" ID)	1	91039-RDK-005
240	188240	Bearing, MDKA/MDPA/MDRA 1st Gear To Idler Gear (.099" Thick)(2.409" OD)(1.720" ID)	1	91018-RDK-003
240	188240A	Bearing, BYFA/B36A/P36A 1st Gear To Idler Gear (.099" Thick)(2.312" OD)(1.720" ID)	1	91018-RDP-003
241	188241	Needle Brg, 1st Gear 2ndary (Inner)(1.842" Long, 1.710" OD)	1	91022-RDK-013
242	188242	Collar, 1st Gear 2ndary (Inner)(2.495" Long, 1.537" OD, 1.260" ID)	1	90443-RDK-000
243	188243	Bearing, 2nd Hub To Idler Gear (.138", 2.585" OD, 1.736" ID)	1-2	91032-RJB-013
244	188244	Brg, BYFA/B36A/P36A Low Hub To 1st Gr (.393", 3.150" OD, 2.275" ID, 21-Balls, #B572-8)	1	TBA
245	188245AA	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.240") (2.040" OD, 1.262" ID, 3-Notch)	1	90502-RDK-010
245	188245AB	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.243") (2.040" OD, 1.262" ID, 3-Notch)	1	90503-RDK-010
245	188245AC	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.245") (2.040" OD, 1.262" ID, 3-Notch)	1	90504-RDK-010
245	188245AD	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.248") (2.040" OD, 1.262" ID, 3-Notch)	1	90505-RDK-010
245	188245AE	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.250") (2.040" OD, 1.262" ID, 3-Notch)	1	90506-RDK-010
245	188245AF	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.253") (2.040" OD, 1.262" ID, 3-Notch)	1	90507-RDK-010
245	188245AG	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.255") (2.040" OD, 1.262" ID, 3-Notch)	1	90508-RDK-010
245	188245AH	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.258") (2.040" OD, 1.262" ID, 3-Notch)	1	90509-RDK-010
245	188245AJ	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.260") (2.040" OD, 1.262" ID, 3-Notch)	1	90510-RDK-010
245	188245AK	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.263") (2.040" OD, 1.262" ID, 3-Notch)	1	90511-RDK-010
245	188245AL	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.265") (2.040" OD, 1.262" ID, 3-Notch)	1	90512-RDK-010
245	188245AM	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.268") (2.040" OD, 1.262" ID, 3-Notch)	1	90513-RDK-010
245	188245AN	Wshr, MDKA/MDPA/MDRA Low Drum To Low Hold Hub (.270") (2.040" OD, 1.262" ID, 3-Notch)	1	90514-RDK-010
245	188245BA	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.240") (2.040" OD, 1.262" ID, 4-Notch)	1	90202-RJF-T00
245	188245BB	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.243") (2.040" OD, 1.262" ID, 4-Notch)	1	90203-RJF-T00
245	188245BC	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.245") (2.040" OD, 1.262" ID, 4-Notch)	1	90204-RJF-T00
245	188245BD	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.248") (2.040" OD, 1.262" ID, 4-Notch)	1	90205-RJF-T00
245	188245BE	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.250") (2.040" OD, 1.262" ID, 4-Notch)	1	90206-RJF-T00
245	188245BF	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.253") (2.040" OD, 1.262" ID, 4-Notch)	1	90207-RJF-T00
245	188245BG	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.255") (2.040" OD, 1.262" ID, 4-Notch)	1	90208-RJF-T00
245	188245BH	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.258") (2.040" OD, 1.262" ID, 4-Notch)	1	90209-RJF-T00
245	188245BJ	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.260") (2.040" OD, 1.262" ID, 4-Notch)	1	90210-RJF-T00
245	188245BK	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.263") (2.040" OD, 1.262" ID, 4-Notch)	1	90211-RJF-T00
245	188245BL	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.265") (2.040" OD, 1.262" ID, 4-Notch)	1	90212-RJF-T00
245	188245BM	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.268") (2.040" OD, 1.262" ID, 4-Notch)	1	90213-RJF-T00
245	188245BN	Wshr, BYFA/B36A/P36A Low Drum To Low Hold Hub (.270") (2.040" OD, 1.262" ID, 4-Notch)	1	90214-RJF-T00
246	188246	Bearing, Low Drum To Low Hold Hub (.098", 2.235" OD)(1.580" ID)	1	91040-RDK-003
251	188251	Caged Needle Bearing, MDKA/MDPA/MDRA 2nd Clutch Hub (Inner)(1.645" Long)(1.950" OD)	1	91021-RDK-013
251	188251A	Caged Needle Bearing, BYFA/B36A/P36A 2nd Clutch Hub (Inner)(.885" Long)(1.940" OD)	2	91021-RJF-T01
252	188252	Washer, BYFA/B36A/P36A 2nd Clutch Hub To 2ndary Shaft (.377" Thk, 2.595" OD, Splined ID)	1	90405-RJB-000
253	188243	Bearing, 2nd Hub To 2ndary Shaft (.138", 2.585" OD, 1.736" ID)	1-2	91032-RJB-013
254	188254	Roller Bearing, Countershaft To Bell Housing (.942" Thick) (2.915" OD)(13 Rollers)(Cast # 2U07042627 Or Cast # HL-8E-NK40.5X75X24-2PX1)	1	91102-RJF-T01
256	188256	Ball Brg, 3rd Shaft To Bell (.471", 2.047" OD, 1.102" ID, #KOYO 60/28YR3)	1	91006-RDK-004
260	188260	Brg, MDKA/MDPA/MDRA Idler Gear To 2nd Gear Counter (.117" Thk, 3.255" OD, 2.565" ID)	1	91035-RDK-003
260	188260A	Bearing, BYFA/B36A/P36A Idler Gear To 2nd Gear Counter(.177" Thk, 3.455" OD, 2.760" ID)	1	91035-RJF-T01
261	188261	Needle Bearing, MDKA/MDPA/MDRA Idler To Counter (Inner)(1.117" Thk, 2.510" OD)	1	91024-PAX-006
261	188261A	Needle Bearing, BYFA/B36A/P36A Idler To Counter (Inner)(1.117" Thk)(2.675" OD)	1	91020-RJF-T01
262	188262	Bearing, MDKA/MDPA/MDRA 1st Gear To Idler (Counter)(.215" Thk)(3.425" OD)(2.210" ID)	1	91036-RDK-003
262	188262A	Bearing, BYFA/B36A/P36A 1st Gear To Idler (Counter)(.215" Thk)(3.525" OD)(2.405" ID)	1	91036-RJF-T01
263	188263	Wshr (Selective) MDKA/MDPA/MDRA 1st Gear To 2nd Gear (Counter)(2.400" OD, 2.013" ID)	1	TBA
263	188263A	Wshr (Selective) BYFA/B36A/P36A 1st Gear To 2nd Gear (Counter)(2.205" OD, 1.819" ID)	1	TBA
267	188267	Collar, BYFA/B36A/P36A 4th Gear Counter To Washer # 268 (1.300", 1.995" OD, 1.817" ID)	1	TBA
268	188268	Washer (Selective) MDKA/MDPA/MDRA 4th Gear Counter To Clips (1.960" OD, 1.685" ID)	1	TBA
268	188268A	Washer (Selective) BYFA/B36A/P36A 4th Gear Counter To Clips (1.993" OD, 1.818" ID)	1	TBA
269	188269	Washer, MDKA/MDPA/MDRA 5th Gear Counter To Snap Ring # 886 (.235" Thk)	1	90404-RDK-000
269	188269A	Washer, BYFA/B36A/P36A 5th Gear Counter To Snap Ring # 886 (.118" Thk)	1	90404-RJB-E00
271	188271	Needle Bearing, MDKA/MDPA/MDRA 5th Gear To Counter (Inner)(1.005" Thk, 1.585" OD)	1	91028-POZ-013
271	188271A	Needle Bearing, BYFA/B36A/P36A 5th Gear To Counter (Inner)(1.125" Thk, 1.570" OD)	1	91028-RJB-003
272	188272	Collar, Rev Gear (Inner) To Counter (.572", 1.575" OD, 1.222" ID, 4-Notches)	1	90442-RDK-000
273	188273	Needle Brg, Rev Gear (Inner) To Counter (.560" Thk, 1.780" OD)	1	91024-PAX-006
274	188274	Ball Brg, MDKA/MDPA/MDRA Counter To Case (.745", #NSK B31-13NX Or HTF B31-13E)	1	91003-PVG-005

# HONDA & ACURA

## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
274.....	188274A.....	Ball Bearing, BYFA/B36A/P36A Counter To Case (.825" Thick, Cast # NSK 31-23AE).....	1.....	91003-RWE-005
275.....	188275.....	Ball Brg, BYFA/MDKA/MDPA Transfer Driven Gear To Case (12-Balls, #NTN SF04A48).....	1.....	91008-RDK-003
276.....	188276.....	Ball Bearing, BYFA/MDKA/MDPA Transfer Driven Gear To Bell Hsg (9-Balls, #SC08A70C3).....	1.....	91009-RDK-003
277.....	188277.....	Shim (Select) BYFA/MDKA/MDPA Transf Driven Gr To Ball Brg (Rear)(1.122" OD, .875" ID).....	1.....	TBA
278.....	188278.....	Washer(Selective) 3rd Shaft Snap Ring #895 To #279 Brg (1.052" OD, .800" ID).....	1.....	TBA
279.....	188279.....	Roller Brg, 3rd Shaft (Rear) To Case (.670", (1.615" OD, .785" ID, #NSK 2820-10).....	1.....	TBA
280.....	188280.....	Bearing, 3rd Gear To 4th/Idler (.118" Thk, 2.115" OD, 1.185" ID).....	1-2.....	91034-RDK-003
281.....	188280.....	Bearing, 3rd Gear To 3rd Clutch (.118" Thk, 2.115" OD, 1.185" ID).....	1-2.....	91034-RDK-003
282.....	188282.....	Washer (Selective) 3rd Gear To 3rd Clutch Drum (2.090" OD, Splined ID).....	1.....	TBA
283.....	188283.....	Needle Brg, Reverse Idler Gear (Inner) (.575" Thk, .690" OD)(Takes 2).....	2.....	91025-P24-006
284.....	98421.....	Washer, (.040" Thick)(1.175" OD)(Flat).....	1.....	90408-P7X-006
285.....	188285.....	Needle Brg, 3rd Gear 3rd Shaft (Inner) (1.245" Long, 1.385" OD).....	1.....	91019-RDK-013
286.....	188286.....	Ball Brg, BYFA/B36A/P36A 2ndary Shaft To Case (13-Balls, #SX06C89C3V2).....	1.....	91005-RWE-003
289.....	188289K.....	Brg & Race, BVLA/MDKA/MDPA/MDRA Diff To Case (24-Rollers).....	1.....	91122-RDK-003
289.....	188289AK.....	Bearing & Race, B36A/P36A Diff To Case (21-Rollers, 1.770" ID).....	1.....	91122-R36-005
290.....	188290.....	Shim, MDKA/MDPA/MDRA Diff To Case (Selective)(3.333" OD)(2.790" ID)(Split).....	1.....	TBA
290.....	188290A.....	Shim, BYFA/B36A/P36A Diff To Case (Selective)(3.333" OD)(2.790" ID)(Solid).....	1.....	TBA
291.....	121430C.....	Cup Race, MDKA/MDPA/MDRA Diff To Bell Hsg (.610" Thk, 3.150" OD, #ETA-CR-09A44ST).....	1.....	TBA
292.....	188292.....	Cone Brg & Race, BYFA/B36A/P36A Diff To Bell (20-Rollers, 1.772" ID, 3.425" OD Race).....	1.....	91120-R36-005
292.....	121420E.....	Cone Brg, MDKA/MDPA/MDRA Diff To Bell (20-Rollers, 1.770" ID, Cast #ETA-CR-09A44ST).....	1.....	TBA
292.....	K121420E.....	Cone Brg & Race, MDKA/MDPA/MDRA Diff To Bell (20-Rollers, Cast #ETA-CR-09A44ST).....	1.....	TBA
294.....	188294.....	End Cap Washer, MDKA/MDPA/MDRA Low Sprag To Ball Brg #297 (.032", 3.145" OD, 2.290" ID).....	1.....	TBA
294.....	188294A.....	End Cap Washer, BYFA/B36A/P36A Low Sprag To Ball Brg #297 (.032", 3.145" OD, 2.535" ID).....	1.....	TBA
295.....	188295.....	End Cap Washer, MDKA/MDPA/MDRA Low Sprag To Low Hub #574 (.043", 2.930" OD, 2.292" ID).....	1.....	TBA
295.....	188295A.....	End Cap Washer, BYFA/B36A/P36A Low Sprag To Low Hub #574 (.036", 3.150" OD, 2.285" ID).....	1.....	TBA
296.....	188296B.....	Washer, MDKA/MDPA/MDRA Low Clutch Hub To 1st Gear (.023", 3.330" OD, 2.315" ID, 4-Tabs).....	1.....	TBA
297.....	188297.....	Ball Brg, MDKA/MDPA/MDRA Low Hold Hub To 2ndary Shaft (16-Balls, #NSK 6911).....	1.....	TBA
297.....	188297A.....	Ball Brg, BYFA/B36A/P36A Low Hold Hub To 2ndary Shaft (21-Balls, #B57Z-7).....	1.....	TBA
298-1.....	188298-1.....	Ball Brg, Park Actuator Rod To Case (.235" Thk, Cast # NSK 699A1).....	1.....	91006-P1B-003
298-2.....	188298.....	Ball Brg, Park Actuator Rod To Bell Hsg (.235" Thk, Cast # NSK 6901).....	1-2.....	91209-612-003
298.....	188298.....	Ball Brg, Shift Rod To Case (.235" Thk, Cast # NSK 6901).....	1-2.....	91209-612-003
<b>GASKETS &amp; RUBBER COMPONENTS</b>				
318.....	121597LA.....	Gasket, Case (24-Bolt) AWD, BK4A/MJBA/BYFA/PN3A, 2007-Up.....	1.....	21811-RDK-000
318.....	121597LB.....	Gasket, Case (23-Bolt) FWD BDHA/BK3A/MM2A/B36A/P36A/BGRA/PGRA/PN4A/B97A.....	1.....	21811-R36-000
319.....	188319.....	O-Ring, 2ndary Shaft Sleeve #697 To Bell Hsg.....	2.....	TBA
<b>ELECTRICAL COMPONENTS</b>				
.....	.....	**SEE HONDA/ACURA SOLENOID QUICK REF FOR SOLENOIDS & PRESS SWITCHES**.....	.....	.....
410.....	188410.....	Neutral Safety Switch, MDKA/MDPA/MDRA (10 Blade Connector)(Cast # RDP).....	1.....	28900-RDK-003
410.....	188410A.....	Neutral Safety Switch, BYFA/B36A/P36A (10 Pin Connector)(Cast # RYF).....	1.....	28900-RYF-023
436.....	121958C.....	Sensor, OSS (#7509A, 3-Prong 90-Degree Conn) (Rear Sensor).....	1.....	28810-RWE-003
437.....	121952C.....	Sensor, BYFA/MDKA/MDPA Temperature (2 Blade, Large Connector)(8 3/4" Long Harness).....	1.....	28650-RDK-004
437.....	121952D.....	Sensor, B36A/MDRA/P36A Temperature (2 Pin, Small Connector)(5 1/4" Long Harness).....	1.....	28650-R36-003
438.....	121954A.....	Sensor, ISS (#7511F, 3-Prong 180-Degree Conn) (Front Sensor).....	1.....	28820-RWE-003
444.....	188444.....	Case Conn, (4-Pin Grey Ext Conn/2-Black & 2-Brown Internal Conn's).....	1.....	28360-RDK-003
<b>PUMP COMPONENTS</b>				
529-1.....	188529-1.....	Dowel Pin, BYFA/B36A/MDKA/MDPA/MDRA/P36A Stator Shaft Stop (2.790" OD)(.275" OD).....	1.....	90702-RDK-000
529.....	188529.....	Tube, BYFA/B36A/MDKA/MDPA/MDRA/P36A Stator (PWE Casting)(4.290" Long Shaft).....	1.....	25155-RWE-000
530.....	98201B.....	Pump Gears, BYFA/B36A/MDKA/MDPA/MDRA/P36A (.510" Thk)(19T & 29T, 39-Splines).....	1.....	TBA
535.....	88535M.....	Pin, Pump Gear 2003-Up.....	1.....	25145-PA9-010
<b>DRUMS</b>				
550.....	188550.....	Drum, MDKA/MDPA/MDRA 4th/5th Clutch (24 Teeth Steels)(2.760" Wide)(5.470" OD).....	1.....	22661-RDK-013
550.....	188550A.....	Drum, BYFA/B36A/P36A 4th/5th Clutch (24 Teeth Steels)(2.905" Wide)(5.550" OD).....	1.....	22661-RYF-003
552.....	188552.....	Drum, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (24T Steels)(5.150" OD, 36-Oval Holes).....	1.....	22610-RDK-033
554.....	188554.....	Drum, MDKA/MDRA Low/Low Hold Clutch (3.090" Thick)(5.775" OD)(24-Oval Holes).....	1.....	22510-RDK-003
554.....	188554A.....	Drum, BYFA/B36A/MDPA/P36A Low/Low Hold Clutch (3.090" Thick)(5.670" OD) (36-Oval Holes).....	1.....	22510-RYF-003
555.....	188555.....	Drum, MDKA/MDPA/MDRA 3rd Clutch (1.690" Thick)(5.395" OD)(20 Teeth Steels).....	1.....	22651-RDK-003
555.....	188555A.....	Drum B36A/P36A 3rd Clutch (1.715" Thick)(5.475" OD)(20 Teeth Steels).....	1.....	22651-RYF-003
555.....	188555B.....	Drum, BYFA 3rd Clutch (1.805" Thick)(5.470" OD)(24 Teeth Steels).....	1.....	22651-PVL-003
560.....	188560.....	Piston Kit, MDKA/MDPA/MDRA 4th & 5th(#561) Clutch (Piston Is .345" Thick At The Edge).....	1.....	TBA
560.....	188560A.....	Piston Kit, BYFA/B36A/P36A 4th & 5th(#561) Clutch (Piston Is .320" Thick At The Edge).....	1.....	TBA
562.....	188562.....	Piston Kit, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch.....	1.....	TBA
565.....	188565.....	Piston Kit, MDKA/MDPA/MDRA 3rd Clutch.....	1.....	TBA
565.....	188565A.....	Piston Kit, B36A/P36A 3rd Clutch.....	1.....	TBA
565.....	188565B.....	Piston Kit, BYFA 3rd Clutch.....	1.....	TBA



## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
567	188567	Piston Kit, MDKA/MDPA/MDRA Low Hold Clutch	1	TBA
567	188567A	Piston Kit, BYFA/B36A/P36A Low Hold Clutch	1	TBA
<b>HUBS</b>				
572	188572	Hub, MDKA/MDPA/MDRA 2nd Clutch (.490" Thick)(2.980" OD)	1	TBA
572	188572A	Hub, BYFA/B36A/P36A 2nd Clutch (.635" Thick)(3.122" OD)	1	TBA
574	188574	Hub, MDKA/MDPA/MDRA Low Clutch (49-Clutch Splines)(1.625" Thick)	1	TBA
574	188574A	Hub, BYFA/B36A/P36A Low Clutch (49-Clutch Splines)(2.015" Thick)	1	TBA
577	188577	Hub, MDKA/MDPA/MDRA Low Hold Clutch (1.655" Thick)(1.515" ID)(W/44-Clutch Splines)	1	23418-RDK-000
577	188577A	Hub, BYFA/B36A/P36A Low Hold Clutch (1.683" Thick)(1.515" ID)(W/44-Clutch Splines)	1	23418-RJB-E00
<b>SPRAGS</b>				
654	188654	Sprag, Low (26 Elements)(.595" Thick)(2.972" OD At The Lip)	1	TBA
<b>SHAFTS, OIL GUIDES &amp; BAFFLES</b>				
672	188672	Mainshaft, MDKA/MDPA/MDRA (15 1/4" Long)(43 Teeth, No Groove)	1	23210-RDK-305
672	188672A	Mainshaft, B36A/P36A (15 3/4" Long)(42 Teeth, 1 Wide & 1 Narrow Groove)	1	23210-RWE-305
672	188672B	Mainshaft, BYFA (15 3/4" Long)(42 Teeth, 3 Groove)	1	23210-RYF-305
673	188673	3rd Shaft, MDKA/MDPA/MDRA (6 5/16" Long)(1.130" From Front Of Shaft To Flange)	1	23240-RDK-000
673	188673A	3rd Shaft, B36A/P36A (6 1/2" Long)(1.250" From Front Of Shaft To Flange)	1	23240-RWE-A00
673	188673B	3rd Shaft, BYFA (6 1/2" Long)(1.130" From Front Of Shaft To Flange)	1	23240-RWE-000
675	188675	Secondary Shaft, MDKA/MDPA/MDRA (12 1/2" Long)(.253" Thk Flange)(3-Sets Of Splines)	1	23231-RDK-030
675	188675B	Secondary Shaft, BYFA/B36A/P36A (12 5/8" Long)(.178" Thick Flange)(4-Sets Of Splines)	1	23230-RWE-010
676	188676	Countershaft, MDKA (11 13/16" Long)(16 Teeth, No Groove)(W/5 Sets Of Splines)	1	23221-RDK-000
676	188676A	Countershaft, B36A/P36A (12 1/4" Long)(16 Teeth, 1 Groove)(W/4 Sets Of Splines)	1	23221-R97-000
676	188676B	Countershaft, MDPA/MDRA (11 13/16" Long)(17 Teeth, 1 Groove)(W/5 Sets Of Splines)	1	TBA
676	188676C	Countershaft, BYFA (12 1/4" Long)(15 Teeth, 1 Wide Groove)(W/4 Sets Of Splines)	1	23211-RJF-T03
686	188686	Oil Guide, 3rd Shaft To Bell Hsg (Tin, .024" Thk, 2.038" OD, #RDK)	1	23225-RDK-000
689	188689	Oil Guide, Countershaft To Bell Hsg (Tin, .023" Thk, #RDK)	1	23235-RDK-000
694	188694	Retainer, MDKA/MDPA/MDRA Horse Shoe Clip # 887 (.124" Thk)(1.965" OD)(1.690" ID)	1	90433-RDK-000
694	188694A	Retainer, BYFA/B36A/P36A Horse Shoe Clip # 887 (.135" Thk)(2.100" OD)(1.825" ID)	1	90433-RJF-T00
695-1	188695-1	Oil Baffle, MDKA/MDPA/MDRA Diff Hsg To Bell (3.140" OD)(1.810" ID)(Flat Center)	1	TBA
695-1	188695-1A	Oil Baffle, BYFA/B36A/P36A Diff Hsg To Bell ((3.415" OD)(1.807" ID)(Raised Center)	1	TBA
695	188695	Oil Baffle, BYFA/MDKA/MDPA/MDRA Diff Hsg To Case (.039" Thk)(No Tab)	1	41382-RDK-000
695	188695	Oil Baffle, B36A/P36A Diff Hsg To Case (.039" Thk)(3.330" OD)(1.812" ID)(1-Large Tab)	1	41382-R36-000
697	188697	Oil Guide Collar, In Bell Hsg Under Roller #238 Brg (Alum)(.815" Thk)(1.142" ID)	1	TBA
698-1	188698-1	Oil Baffle, BYFA/B36A/P36A 3rd Clutch (Tin)(7 1/2" Long)(2 Bolt)	1	21221-RWE-000
698	188698	Oil Baffle, MDKA/MDPA/MDRA Bolts To Regulator Body (3 1/4" Tall)(4 1/2" Long)(2 Bolt)	1	21214-RDK-000
698	188698A	Oil Baffle, BYFA/B36A/P36A Bolts To Regulator Body (5 1/4" Tall)(4 1/2" Long)	1	21214-RWE-000
699	188699	Oil Baffle, BYFA/MDKA/MDPA Bolts To Bell Hsg (2 Bolt)(1 Piece Type)	1	21612-RDK-010
699	188699A	Oil Baffle, B36A/P36A Bolts To Bell Hsg (2 Bolt)(2 Piece Type)	1	21216-PVL-000
699	188699B	Oil Baffle, MDRA Bolts To Bell Hsg (2 Bolt)(2 Piece Type)	1	TBA
<b>GEARS</b>				
708	188708	Gear, BYFA/MDKA/MDPA Transfer Driven (32 Teeth, No ID)(6.005" Long Shaft)	1	29021-RDK-000
710	188710	Gear, MDKA/MDPA/MDRA 4th/Idler (3rd Shaft)(35 Teeth, No ID)(1.310" Thick)(3.460" OD)	1	23475-RDK-000
710	188710A	Gear, BYFA/B36A/P36A 4th/Idler (3rd Shaft)(36 Teeth, 2 ID)(1.310" Thick)(3.550" OD)	1	23475-RWE-000
712	188712	Gear, MDKA/MDRA Idler (Countershaft) (44 Teeth, No ID)(4.067" OD)	1	23515-RDK-000
712	188712A	Gear, B36A/P36A Idler (Countershaft) (45 Teeth, 1 Wide & 1 Narrow ID)(4.160" OD)	1	23515-RWE-000
712	188712B	Gear, MDPA Idler (Countershaft) (44 Teeth, 2 ID)(4.067" OD)	1	TBA
712	188712C	Gear, BYFA Idler (Countershaft) (45 Teeth, 3 ID)(4.160" OD)	1	23515-RWE-000
714	188714	Gear, MDKA/MDRA Idler (2ndary Shaft) (53 Teeth, No ID)(W/4 Notches On 1 Side)	1	23494-RDK-000
714	188714A	Gear, B36A/P36A Idler (2ndary Shaft) (52T, 1 Wide & 1 Narrow ID)(4-Notches Both Sides)	1	23495-RWE-000
714	188714B	Gear, MDPA Idler (2ndary Shaft) (53 Teeth, 2 ID)(W/4 Notches On Both Sides)	1	TBA
714	188714C	Gear, BYFA Idler (2ndary Shaft) (53 Teeth, 3 ID)(W/4 Notches On Both Sides)	1	23495-RYF-000
<b>DIFFERENTIALS</b>				
715	188715	Differential Assembly, MDKA/MDPA (70 Teeth, No Groove Ring Gear)(12 Bolt Housing)	1	TBA
		(58 Teeth, No Groove AWD Transfer Gear)(Uses A 29 & 24 Roller Bearings)		
715	188715A	Diff Assy, B36A/P36A (69 Teeth, 1 Wide ID Ring Gear)(14-Bolt Hsg) (20 & 21 Roller Brgs)	1	TBA
715	188715B	Diff Assy, MDRA (69 Teeth, 1 Narrow ID Ring Gear)(12 Bolt Hsg) (20 & 24 Roller Brgs)	1	TBA
715	188715C	Differential Assembly, BYFA (68 Teeth, 1 Wide Groove Ring Gear)(14 Bolt Housing)	1	TBA
		(59 Teeth, No Groove AWD Transfer Gear)(Uses A 20 & 21 Roller Bearings)		
<b>VALVE BODIES &amp; COMPONENTS</b>				
740	188740	Valve Body, MDKA/MDPA/MDRA (Cast # RDK)	1	27000-RDK-040
740	188740A	Valve Body, BYFA/B36A/P36A (Cast # R36)	1	27000-RYF-A00
741	K121908A	Lube Kit, Conv Overheat, Cooler Flow/Conv Charge Fixes Most V-6 1997-Up (Transgo)	1	HONDA-LK

## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
741.....	K121908B	Lube Kit, Conv Overheat, Cooler Flow/Conv Charge Fixes Most 4-Cyl 1994-Up (Transgo).....	1	HONDA-LK2
742-3	188742-3	Plate, MDKA/MDPA/MDRA Secondary Valve Body To Valve Body (Separator Plate).....	1	TBA
742-3	188742-3A	Plate, BYFA/B36A/P36A Secondary Valve Body To Valve Body (Separator Plate).....	1	TBA
742	188742	Secondary Valve Body, MDKA/MDPA/MDRA (Cast # RDK).....	1	TBA
742	188742A	Secondary Valve Body, BYFA/B36A/P36A (Cast # R36).....	1	TBA
747	188747	Plate, MDKA/MDPA/MDRA Valve Body (Separator Plate).....	1	27112-RDK-020
747	188747A	Plate, BYFA/B36A/P36A Valve Body (Separator Plate).....	1	27112-RWE-000

### HOUSINGS, CASES & COMPONENTS

750.....	188750	Bell Housing, MDKA/MDPA (24 Bolts To Case)(5 1/4" Top Bolts)(Cast # RDK).....	1	21111-RDK-306
750.....	188750A	Bell Housing, B36A/P36A (23 Bolts To Case)(5 1/4" Top Bolts)(Cast # R36).....	1	21110-R36-305
750.....	188750B	Bell Housing, MDRA (24 Bolts To Case)(5 1/4" Top Bolts)(Cast # RDR).....	1	TBA
750.....	188750C	Bell Housing, BYFA (24 Bolts To Case)(5 1/4" Top Bolts).....	1	21110-RYF-305
756.....	188756	Cover, MDKA/MDPA/MDRA Solenoid (7 Bolt, Aluminum).....	1	28450-RDK-000
756.....	188756A	Cover, BYFA/B36A/P36A Solenoid (7 Bolt, Aluminum)(Cast # RJF).....	1	28450-RJF-T00
757.....	188757	Rear Cover, MDKA/MDPA/MDRA Mainshaft (3 Bolt)(Cast # RDK).....	1	21240-RDK-000
757.....	188757A	Rear Cover, BYFA/B36A/P36A Mainshaft (3 Bolt)(Cast # RJF).....	1	21230-RJF-T00
758.....	188758	Cap, MDKA/MDPA/MDRA (Case, Rear At Countershaft)(2 Bolt)(Cast # RDK).....	1	21251-RDK-010
758.....	188758A	Cap, BYFA/B36A/P36A (Case, Rear At Countershaft)(2 Bolt)(Cast # RJB).....	1	21251-RJB-000
760.....	188760	Case, MDKA (24 Bolts To Bell) (Top Switch # 439 Points Up)(3-Slots By Axle Seal).....	1	21010-RDK-305
760.....	188760A	Case, B36A/P36A (23 Bolts To Bell)(Cast # RDH Or R36)(1-Curved Slot By Axle Seal).....	1	21210-R36-000
760.....	188760B	Case, MDRA (24 Bolts To Bell) (Has 3 Slots By Axle Seal).....	1	TBA
760.....	188760C	Case, MDPA (24 Bolts To Bell) (Top Switch #439 Points To The Rear)(3-Slots By Axle Seal).....	1	TBA
760.....	188760D	Case, BYFA (24 Bolts To Bell) (Has 1 Slot By Axle Seal)(Cast # RWE).....	1	21210-RYF-010
760.....	188760E	Cover, BYFA/B36A/MDKA/MDPA/MDRA/P36A Canister Filter (2-Bolt)(#RJB Or No Cast #).....	1	25471-RJB-000
781.....	188781	Bolt, BYFA/B36A/MDKA/MDPA/MDRA/P36A Solenoid Cover To Case.....	7	TBA
782.....	188782	Bolt, BYFA/B36A/MDKA/MDPA/MDRA/P36A Valve Body To Case.....	10	TBA
783.....	188783	Bolt, BYFA/B36A/MDKA/MDPA/MDRA/P36A Holds Bracket # 846 To Bell Housing.....	1	92101-06020-0A
786.....	188786	Bolt, MDKA/MDPA Differential & Transfer Gear.....	12	TBA
786.....	188786A	Bolt, B36A/P36A Differential Ring Gear.....	14	TBA
786.....	188786B	Bolt, MDRA Differential Ring Gear.....	12	TBA
786.....	188786C	Bolt, BYFA Differential & Transfer Gear.....	14	TBA
789.....	188789	Bolt, BYFA/B36A/MDKA/MDPA/MDRA/P36A Linear Solenoid Housing To Case.....	6	TBA
792.....	188792	Bolt, MDKA/MDPA/MDRA Accumulator To Case.....	11	TBA
792.....	188792A	Bolt, BYFA/B36A/P36A Accumulator To Case.....	11	TBA
795.....	121948C	Nut, BYFA/B36A/MDKA/MDPA/MDRA/P36A, Mainshaft (Right Hand Thread).....	1-2	90201-RDK-000
796.....	121948A	Nut, BYFA/B36A/MDKA/MDPA/MDRA/P36A Countershaft(Left Hand Thread)(.515" Thick).....	1	90201-PRP-000
797.....	121948C	Nut, BYFA/B36A/MDKA/MDPA/MDRA/P36A, 2ndary Shaft (Right Hand Thread).....	1-2	90201-RDK-000

### GEARS, FORKS & CUSHIONS

801.....	188801	Gear, MDKA/MDPA/MDRA 1st (Countershaft) (59 Teeth, No ID)(5.970" OD).....	1	23421-RDK-010
801.....	188801A	Gear, B36A/P36A 1st (Countershaft) (61 Teeth, 1 Wide ID)(5.970" OD).....	1	23421-R36-000
801.....	188801B	Gear, BYFA 1st (Countershaft)(61 Teeth, 1 Wide & 1 Narrow ID)(5.970" OD).....	1	23421-RYF-000
801.....	188801C	Gear, BJFA 1st (Countershaft)(59 Teeth, 2 ID) 2006-Up.....	1	TBA
801.....	188801D	Gear, MURA 1st (Countershaft)(61 Teeth, 1 Narrow ID) 2005-Up.....	1	TBA
801.....	188801E	Gear, BVLA 1st (Countershaft)(57 Teeth, 2 ID) 2006-Up.....	1	TBA
802.....	188802	Gear, BJFA/MDKA/MDPA/MDRA 1st (2ndary)(27T, No ID)(2.960" OD).....	1	23411-RDK-A00
802.....	188802K	Gear Assembly, BJFA/MDKA/MDPA/MDRA 1st (2ndary)(27T, No ID) (#802 to #577).....	1	TBA
802.....	188802A	Gear, BYFA/B36A/P36A 1st (2ndary Shaft)(28 Teeth, 1 Wide ID)(2.935" OD).....	1	23411-RYF-000
802.....	188802AK	Gear Assembly, BYFA/B36A/B97A/P36A 1st (2ndary)(28T, 1 Wide ID) (#802 to #577).....	1	TBA
802.....	188802B	Gear, MDKA/MDRA 1st (2ndary Shaft)(30 Teeth, 1 ID).....	1	TBA
802.....	188802BA	Gear, MDKA/MDRA 1st (2ndary Shaft)(27 Teeth, 2 ID).....	1	TBA
802.....	188802C	Gear, MURA 1st (2ndary Shaft)(28 Teeth, 1 Narrow ID)(2.935" OD).....	1	TBA
802.....	188802CK	Gear Assembly, MURA 1st (2ndary)(28T, 1 Narrow ID) (#802 to #577).....	1	TBA
802.....	188802D	Gear, BVLA 1st (2ndary)(29 Teeth, 2 ID)(3.115" OD).....	1	TBA
802.....	188802DK	Gear Assembly, BVLA 1st (2ndary Shaft)(29T, 2 ID) (#802 to #577).....	1	TBA
803.....	188803	Gear, BYFA/MDKA/MDPA/MDRA 2nd (2ndary Shaft)(37T, No ID Or 2 ID).....	1	TBA
803.....	188803A	Gear, B36A/P36A 2nd (2ndary Shaft) (37T, 1 ID).....	1	TBA
804.....	188804	Gear, MDKA/MDPA/MDRA 2nd (Countershaft) (47T, No ID)(4.970" OD).....	1	23441-RDK-000
804.....	188804A	Gear, B36A/P36A 2nd (Countershaft) (48T, 1 Wide ID)(5.030" OD).....	1	23441-R36-000
804.....	188804B	Gear, BYFA 2nd (Countershaft)(48T, 2 ID)(5.030" OD).....	1	23441-RWE-000
807.....	188807	Gear, BVLA/MDKA/MDPA/MDRA/MURA 3rd (3rd Shaft)(44T, No ID)(4.070" OD) (42T Clu Hub).....	1	23451-RDK-000
807.....	188807A	Gear, BYFA/B36A/P36A 3rd (3rd Shaft) (45T, 1 Wide & 1 Narrow ID) (4.160" OD)(42T Clu Hub).....	1	23451-RWE-000
807.....	188807B	Gear, B97A 3rd (3rd Shaft)(45T, 1 Wide & 1 Narrow ID) (32T Clu Hub).....	1	TBA
807.....	188807C	Gear, BYFA/B36A/P36A 3rd (3rd Shaft)(45T, 3 ID)(2.580" Thick)(4.160" OD) (42T Clu Hub).....	1	23451-RYF-000
807.....	188807D	Gear, BJFA 3rd (3rd Shaft)(44 Teeth, 2 IDs)(42 Teeth Clutch Hub).....	1	TBA
809.....	188809	Gear, MDKA/MDPA/MDRA 4th (Mainshaft) (48T, No ID)(44 Clutch Splines)(Gear Only).....	1	23461-RDK-000
809.....	188809A	Gear, Brg & Snap Ring, BYFA/B36A/P36A 4th (Main)(47T, 1 Wide & 1 Narrow ID)(44-Splines).....	1	23461-RYF-305



## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
810	188810	Gear, MDKA/MDPA/MDRA 4th (Countershaft) (35T, No ID)(3.460" OD)	1	23471-RDK-000
810	188810A	Gear, BYFA/B36A/P36A 4th (Countershaft) (36T, 1 Wide & 1 Narrow ID) (3.550" OD)	1	23471-RWE-000
812	188812	Gear, MDKA/MDPA/MDRA 5th (Mainshaft) (27T, No ID / 49T, No ID) (44T Clu Hub)	1	23481-RDK-000
812	188812A	Gear, B36A/P36A 5th (Mainshaft)(27 Teeth, No ID)(52T, 1 Wide ID) (44T Clu Hub)	1	23481-RYF-000
812	188812B	Gear, BYFA 5th (Mainshaft)(27 Teeth, No Groove)(52T, 1 Narrow ID) (44T Clu Hub)	1	23481-RYF-000
813	188813	Gear, MDKA/MDPA/MDRA 5th (Countershaft) (26 Teeth, No ID)(2.918" OD)(1.615" ID)	1	23491-RDK-000
813	188813A	Gear, B36A/P36A 5th (Countershaft)(28 Teeth, 1 Wide ID)(2.915" OD)(1.615" ID)	1	23491-RYF-000
813	188813B	Gear, BYFA 5th (Countershaft)(28 Teeth, 1 Narrow ID)	1	TBA
816	188816	Gear, BYFA/B36A/MDKA/MDPA/MDRA/P36A Rev (Counter)(51T, No ID)(4.790" OD)(1.870" ID)	1	23531-RDK-000
818	188816A	Gear, BYFA/B36A/MDKA/MDPA/MDRA/P36A Reverse Idler (28T, No ID Or 1 ID)	1	23541-RDK-000
820	188820	Bracket W/Shaft, MDKA Reverse Idler Gear (2 Bolt, Aluminum)(2.280" Wide)	1	21215-RDK-010
820	188820A	Bracket W/Shaft, BYFA/B36A/MDPA/MDRA/P36A Rev Idler Gear (2-Bolt, Alum, 1.670" Wide)	1	21215-R36-000
830	188830	Selector, BYFA/B36A/MDKA/MDPA/MDRA/P36A Reverse (.588" Thick)	1	23565-RDK-000
835	98822ZA	Hub, BYFA/B36A/MDKA/MDPA/MDRA/P36A Reverse (26 Teeth)(.473" Thick)(30 Splines)	1	23566-RDK-000
840	188840	Fork, BYFA/B36A/MDKA/MDPA/MDRA/P36A Reverse (2.460" ID At Forks)	1	24111-RYF-000
846	188846	Bracket, BYFA/B36A/MDKA/MDPA/MDRA/P36A Holds #238 Brg In Bell Hsg	1	21101-PRP-000
850	188850	Cushion, MDKA/MDRA 4th Clutch (.056" Thk)(4.407" OD, 3.913" ID)(Wavy, Split)	1	22536-RAY-003
850	188850A	Cushion, BYFA/B36A/P36A 4th Clutch (.061" Thk, 4.723" OD)(4.255" ID)(Dished, Solid)	1	22537-PVL-003
850	188850B	Cushion, MDPA 4th Clutch (.064" Thick)(Dished, Solid)	1	TBA
851	188850	Cushion, MDKA/MDRA 5th Clutch (.056" Thk)(4.407" OD, 3.913" ID)(Wavy, Split)	1	22536-RAY-003
851	188850A	Cushion, BYFA/B36A/P36A 5th Clutch (.061" Thk, 4.723" OD)(4.255" ID)(Dished, Solid)	1	22537-PVL-003
851	188850B	Cushion, MDPA 5th Clutch (.064" Thick)(Dished, Solid)(Also Fits MDPA 4th Clutch # 850)	1	TBA
852	188852	Cushion, 2nd Clutch (.057", 4.335" OD, 3.870" ID)(Dished)	1	TBA
853	188853	Cushion, Low Clutch (.070", 4.585" OD)(4.110" ID)(Dished)	1	22537-POZ-003
857	188857	Cushion, Low Clutch (.083", 4.685" OD)(4.180" ID)(Dished)	1	22539-RDK-013
858	188858	Cushion, MDKA/MDPA/MDRA 3rd Clutch (.059" Thick)(4.450" OD)(3.880" ID)(Dished)	1	22539-PAX-003
858	188858A	Cushion, B36A/P36A 3rd Clutch (.070" Thick)(4.360" OD)(3.907" ID)(Dished)	1	22539-RJF-003
858	188858B	Cushion, BYFA 3rd Clutch (.071" Thick)(4.450" OD)(3.945" ID)(Dished)	1	TBA

### SNAP RINGS

861	188864	Snap Ring, Holds 4th Press Plate (.071", 5.520" OD)	1-3	90605-POZ-000
862-1	188862-1	Snap Ring, Holds 3rd Spring Retainer (.058", 1.815" ID)	1	90603-PL4-000
862	188862	Snap Ring, Holds 4th Spring Retainer (.058", 1.925" OD)	1-3	90603-POZ-000
864	188864	Snap Ring, Holds 5th Press Plate (.071", 5.520" OD)	1-3	90605-POZ-000
865	188862	Snap Ring, Holds 5th Spring Retainer (.058", 1.925" OD)	1-3	90603-POZ-000
870	186870	Snap Ring, Holds Bearing In Stator (Front)	1	TBA
873	188873	Snap Ring, Holds 2nd Press Plate (.071", 5.055" OD)	1	90605-PX4-000
874	188874	Snap Ring, Holds 2nd Spring Retainer (.059", 1.800" OD)	1	90603-P56-N00
876	188864	Snap Ring, Holds Low Press Plate (.071", 5.520" OD)	1-3	90605-POZ-000
877	188862	Snap Ring, Holds Low Spring Retainer (.058", 1.925" OD)	1-3	90603-POZ-000
877-1	18877-1	Horse Shoe Clips, BYFA/B36A/P36A 2nd Gear Stop (Counter)(.295", 2.280" Long)(2-Pk)	1	90430-RJF-T00
878	188878	Snap Ring, Holds 3rd Press Plate (.071", 5.380" OD)	1	90605-PY4-000
879	188879	Snap Ring, Holds #214 Brg To Mainshaft (.047", 1.190" OD)	1	90603-P4R-000
880	188880	Snap Ring, Holds #235 Brg To Case (.077", 3.355" OD)	1	90615-POZ-000
881	188881	Snap Ring, Holds 2nd Drum To 2ndary Shaft (.047", 1.275" OD)	1	90621-RDK-000
882	188882	Snap Ring, BYFA/MDKA/MDPA/MDRA Holds #220 Brg In 4th Gear (Main) (.099", 3.240" OD)	1	90606-RDK-000
882	18882A	Snap Ring, B36A/P36A Holds Ball Bearing # 220 In 4th Gear (Mainshaft)(.117", 3.240" OD)	1	TBA
883	188883	Snap Ring, Holds 2nd Gear (2ndary) To 2nd Hub (.040", 2.867" OD)	1	TBA
885	188885	Snap Ring, Holds #297 Ball Brg In Low Hub (.040", 3.295" OD)	1	TBA
886	188886	Snap Ring, MDKA/MDPA/MDRA Holds 4th Gear To Countershaft (.048" Thick)(1.865" OD)	1	90608-RDK-000
886	188886A	Snap Ring, BYFA/B36A/P36A Holds 4th Gear To Countershaft (.048" Thick)(1.970" OD)	1	90608-RJF-T00
887	188887	Horse Shoe Clips, MDKA/MDPA/MDRA Holds 4th Gear To Counter (.079", 1.883" Long)(2-Pk)	1	90442-RDK-000
887	188887A	Horse Shoe Clips, BYFA/B36A/P36A Holds 4th Gear To Counter (.079", 1.993" Long)(2-Pack)	1	90431-RJF-T00
889-1	188889-1	Retainer, Holds s #889 Clip To 3rd Shaft (Cupped)	1	90432-RDK-000
889	188889	Retainer, Holds 4th/Idler Gear To 3rd Shaft (.118" Thick)	1	90430-RDK-000
890	188890	Snap Ring, MDKA/MDPA/MDRA #274 Holds Countershaft Bearing To Case (.077", 3.785" OD)	1	90612-RDK-T00
890	188890A	Snap Ring, BYFA/B36A/P36A Holds Countershaft Bearing # 274 To Case (.077", 3.820" OD)	1	90612-RJF-T00
891	188891	Snap Ring, Holds Rev Idler Gear To Shaft (.040", .570" OD)	1	90615-RDK-000
892	188892	Snap Ring, Holds Feed Pipe "B" To Feed Pipe "C" Cap	1	90602-RDK-000
893	188893	Snap Ring, Holds Pipe Cap "C" Into Case (.056", 2.59" OD)	1	90460-RDK-000
895	188895	Snap Ring, Holds 3rd Shaft Retainer # 889-1 (.046", 1.115" OD)	1	90601-RDK-000
897	188897	Snap Ring, Holds Linkage Assy In Case (.040", .575" OD)	1	94510-12000

### ACCUMULATORS, REGULATORS, PISTONS & MISCELLANEOUS

900-3	188900-3	Plate, MDKA/MDPA/MDRA Accumulator To 2nd Body Separator	1	27812-RDK-000
900-3	188900-3A	Plate, BYFA/B36A/P36A Accumulator To 2nd Body Separator	1	27812-RJB-E00
900	188900	Accumulator, MDKA/MDPA/MDRA W/Pistons (Cast # RDK)	1	TBA
900	188900A	Accumulator, BYFA/B36A/P36A W/Pistons (Cast # RJB)	1	TBA

# HONDA & ACURA

## 5-SPEED, 4-SHAFT (B36A, P36A, PN4A)

ILL#	Part#		QTY	REF#
924-3	188924-3	Plate, MDKA/MDPA/MDRA Regulator Separating (21 Round Holes)	1	27212-RDK-000
924-3	188924-3A	Plate, BYFA/B36A/P36A Regulator Separating (19 Round Holes)	1	27212-RJB-E00
924	188924	Regulator Body Assembly, MDKA/MDPA/MDRA (Cast # RDK)(Less Plate)	1	27200-RDK-030
924	188924A	Regulator Body Assy, BYFA/B36A/P36A (Cast # RWE)(Less Plate)	1	27200-R36-A00
958	188958	Retainer/Guide, Feed Pipe "A" (.142", 1.450" OD)(Cast #PW4)	1	22713-PW4-000
960	188960	Piston, MDKA/MDPA/MDRA 4th Clutch (.345" Thick At The Edge)(4.985" OD)(1.730" ID)	1-2	22680-RDK-003
960	188960A	Piston, BYFA/B36A/P36A 4th Clutch (.320" Thick At The Edge)(4.985" OD)(1.730" ID)	1-2	22690-RYF-003
961	188960	Piston, MDKA/MDPA/MDRA 5th Clutch (.345" Thick At The Edge)(4.985" OD)(1.730" ID)	1-2	22680-RDK-003
961	188960A	Piston, BYFA/B36A/P36A 5th Clutch (.320" Thick At The Edge)(4.985" OD)(1.730" ID)	1-2	22690-RYF-003
962	188962	Piston, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch (.340" Thk, 4.710" OD, 1.705" ID)	1	22620-RDK-053
965	188965	Piston, MDKA/MDPA/MDRA 3rd Clutch (.355" Thick At Edge)	1	22670-RDK-003
965	188965A	Piston, B36A/P36A 3rd Clutch (.375" Thick At Edge)(4.870" OD)(1.665" ID)	1	22670-PVL-003
965	188965B	Piston, BYFA 3rd Clutch (.355" Thick At Edge)(4.985" OD)(1.665" ID)	1	22670-RYF-013
967	188967	Piston, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low Hold Clutch (.470" Thk, 4.560" OD, 2.05" ID)	1	22570-RDK-013
969	188969	Piston, BYFA/B36A/MDKA/MDPA/MDRA/P36A Low Clutch (1.250" Thick)(5.380" OD)(Steel)	1	22520-RDK-003
970	188970	Spring, MDKA/MDPA/MDRA 4th Clutch Return (.277" OD Of The Wire)(2.695" OD)	1-2	22642-RDK-003
971	188970	Spring, MDKA/MDPA/MDRA 5th Clutch Return (.277" OD Of The Wire)(2.695" OD)	1-2	22642-RDK-003
971	188971	Spring, BYFA/B36A/P36A 5th Clutch Return (.275" OD Of The Wire)(2.708" OD)	1	22642-RYF-003
972	188972	Spring, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clutch Return (.245" OD Wire, 2.515" OD)	1	22641-RDK-003
975	188975	Spring, BYFA/B36A/MDKA/MDPA/MDRA/P36A 3rd Clutch Return (.275" OD Wire, 2.520" OD)	1	22652-P7W-003
977	188977	Spring, MDKA/MDPA/MDRA Low/Low Hold Clutch Return (2.295" Long)(2.880" OD)	1	22542-P7W-003
977	188977A	Spring, BYFA/B36A/P36A Low/Low Hold Clutch Return (2.180" Long)(2.895" OD)	1	22542-P7W-003
980	188980	Retainer, MDKA/MDPA/MDRA 4th Clutch Spring (.185" Thick)(2.667" OD)(1.748" ID)(Flat)	1-2	22533-RDK-003
981	188980	Retainer, MDKA/MDPA/MDRA 5th Clutch Spring (.185" Thick)(2.667" OD)(1.748" ID)(Flat)	1-2	22533-RDK-003
981	188981	Retainer, BYFA/B36A/P36A 5th Clutch Spring (.425" Thick)(2.895" OD)(1.748" ID)(Cupped)	1	22654-RJB-003
982	188982	Retainer, BYFA/B36A/MDKA/MDPA/MDRA/P36A 2nd Clu Spring (.205" Thk, 2.510" OD, 1.715" ID)	1	22633-RDK-003
983-1	188983-1	Retainer, 2nd Clutch Hub To 2nd Gear (2ndary)(.365" Thk)	1	TBA
983	188983	Retainer, 2nd Gear (2ndary) To #883 Snap Ring (.080" Thk)	1	TBA
985	121641A	Retainer, 3rd Clu Spring (2.725" OD)(1.672" ID)(Cupped)	1	22654-P7W-003
987	188987	Retainer, Low/Low Hold Clutch Spring (.380" Thick)	1	22533-P7W-003
991-1	188991-1	Detent, Rooster Comb	1	24630-RDK-000
991-5	188991-5	Shaft, Rooster Comb Detent (3.242" Long)(.195" OD)	1	TBA
991	188991	Linkage Assembly, MDKA/MDPA/MDRA Internal (9 5/8" Long Shift Rod)	1	24000-RDK-000
991	188991A	Linkage Assembly, BYFA/B36A/P36A Internal (9 1/2" Long Shift Rod)	1	24000-RWE-000
992	188992	Shift Lever, MDKA/MDPA/MDRA External (3 3/16" Long)(W/Pin For Grommet)	1	24412-RDK-010
992	188992A	Shift Lever, BYFA/B36A/P36A External (3-1/16" Long)(W/Hole For Ext Linkage) (#SHJ)	1	54313-SJA-A81
995	188995	Park Pawl Assembly, MDKA/MDPA/MDRA (3 Pieces)	1	TBA
995	188995A	Park Pawl Assembly, BYFA/B36A/P36A (3 Pieces)	1	TBA
999-1	188999-1	Oil Tube, In The Bell Hsg ("U" Shape, 1-Bolt)(5-3/8" Long)	1	22770-RDK-000
999-3	188999-3	Tube Set, MDKA/MDPA/MDRA Accumulator To Case & To Valve Body (10 Pieces)	1	TBA
999-3	188999-3A	Tube Set, BYFA/B36A/P36A Accumulator To Case & To Valve Body (10 Pieces)	1	TBA
999-4	188999-4	Tube Set, Linear Solenoid # 425 (3 Pieces)	1	TBA
999-5	188999-5	Oil Tube, BJFA/BVLA/B97A/MDKA/MDPA/MDRA/MURA/P36A 2ndary Shaft "B"(2.070" Long)	1	22725-RDK-000
999-5	188999-5A	Oil Tube, BYFA/B36A 2ndary Shaft (Pipe B)(1.785" Long)	1	TBA
999-6	188999-6	Oil Tube/Cap Assembly, MDKA/MDPA/MDRA 2ndary Shaft (Pipe C)(3.690" Long, 1-Tab, # RDK)	1	21260-RDK-000
999-6	188999-6A	Oil Tube/Cap Assembly, B36A 2ndary Shaft (Pipe C)(3.690" Long, 2-Tab, # RJF)	1	21251-RJB-000
999-6	188999-6B	Oil Tube/Cap Assembly, BYFA/P36A 2ndary Shaft (Pipe C)(3.345" Long, 2-Tab, # RJF)	1	21260-RJF-T00
999	188999	Oil Tube, Canister Filter Cover To Case (1-Bolt, W/ 4-Bends)	1	25475-RDK-010